

FIREPROOF CURTAIN

HORIZONTAL FIRESHIELD-H

Smokeproof membrane

low-weight smokeproof membrane to cover large openings to prevent the spread of fire and smoke in case of fire.

The system features a light static load on the supporting structure, approximately, 1 kg per sq m of the opening.

Various fire resistance degrees depending on customer needs:

- 120 (no water spraying);
- El120 (with water spraying)
- EI180 (with water spraying)

Installation

Depending on what is needed and considering the room configuration, the membrane can be mounted to the wall, to the ceiling, to the beam using suspenders, horizontally to the wall using seat angles or horizontally to the ceiling.

Dimensions


Maximum width:	unlimited
Maximum height:	unlimited

Leaf

Material:	Firetex600
Fabric weight:	435 g/m2
Weight with coating:	455 g/m2
Material thickness:	0.40 mm

The leaf fabric is certified as non-flammable and non-toxic.



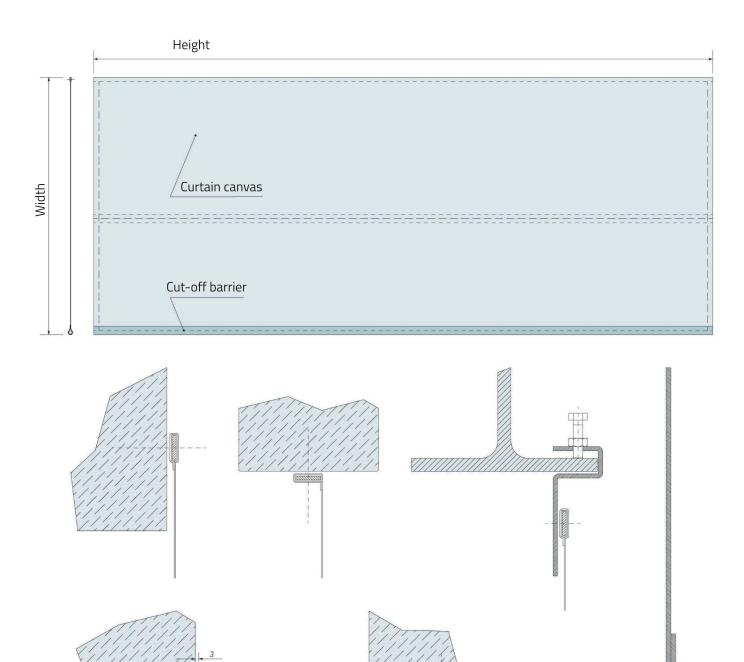

Cut-off barrier

- **Installing the case** a) tightly to the wall
- b) to the ceiling
- c) to the beam using suspenders d) horizontally to the wall
- e) horzontally to the ceiling



offers a comprehensive range of smoke control systems and rooflight domes, translucent roof kits, patios and patio glazing, as well as bespoke plastic products. It has subsidiaries in Sweden, Estonia, Latvia, Lithuania and Russia.

KERAVENT manufactures and markets smoke control systems that increase the level of fire safety. A pioneer in its field, KERAVENT has been a market leader in smoke control since the 1980s.

KERAPLAST

SALE, INSTALLATION AND SERVICE

SIA Keraplast Maija iela 8, Riga, Latvija 02 834 82 22 | 02 605 69 99 keraplast@keraplast.lv | www.keraplast.lv